







ECOMAX (HOBART UK)
SOUTHGATE WAY,
ORTON SOUTHGATE,
PETERBOROUGH,
PE2 8GN
TEL: 0370 168 8881
www.hobartindependent.co.uk

Rack Type Dishwasher Left to Right Operation

C815-A

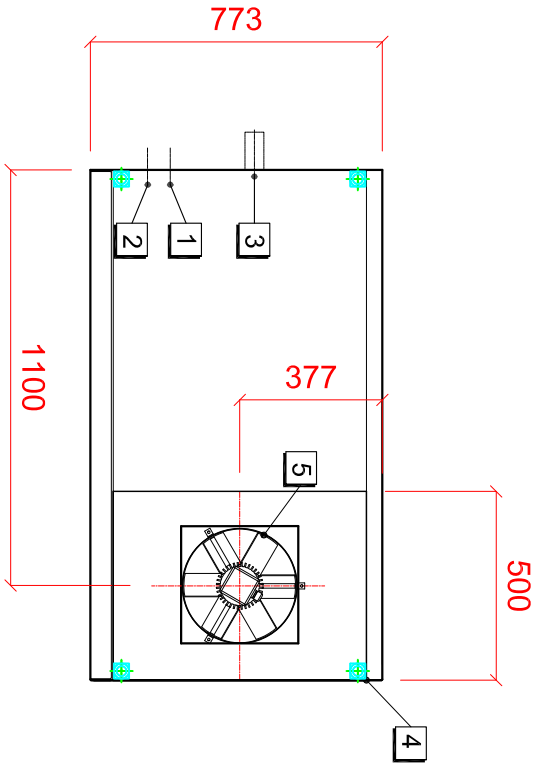

NOTE:
THIS MACHINE REQUIRES A DEDICATED
EXTRACT VIA A SUITABLY SIZED CANOPY
OR DIRECT DUCT WORK CONNECTION TO
MACHINE EXHAUST SPIGOT.

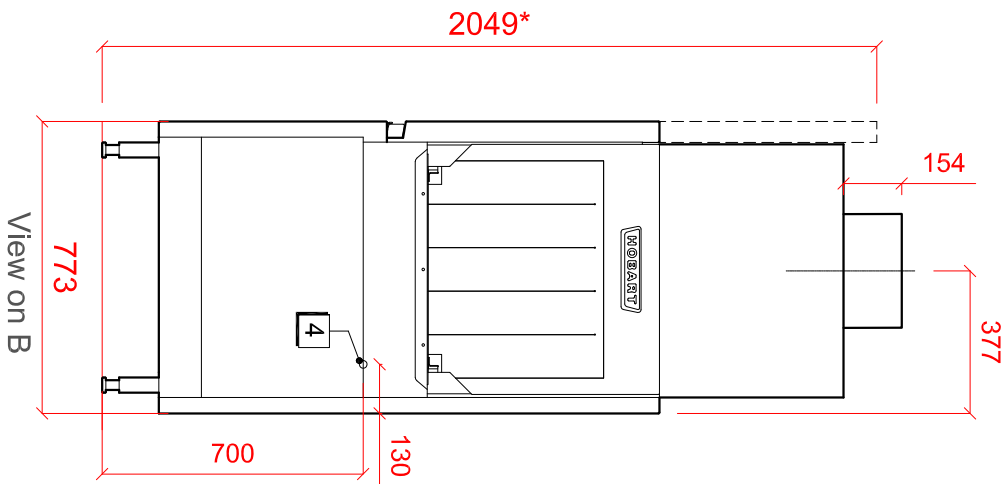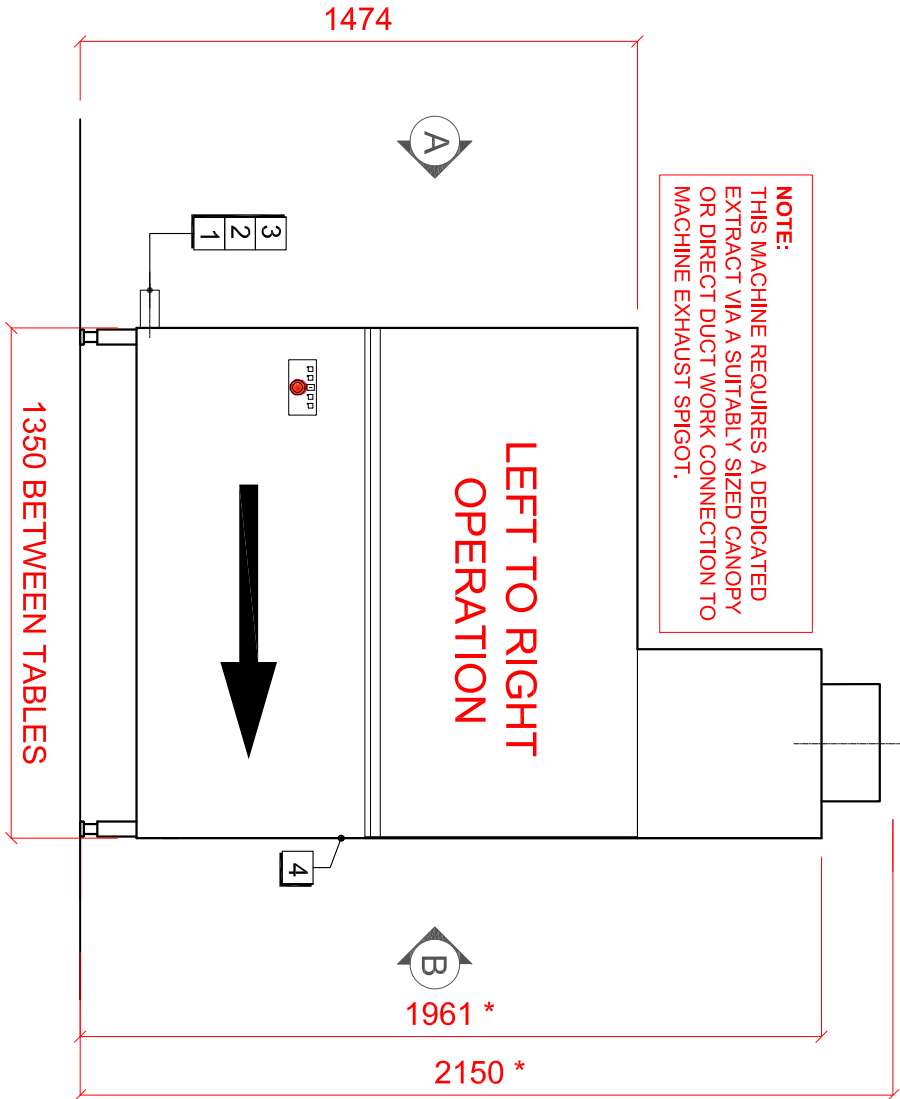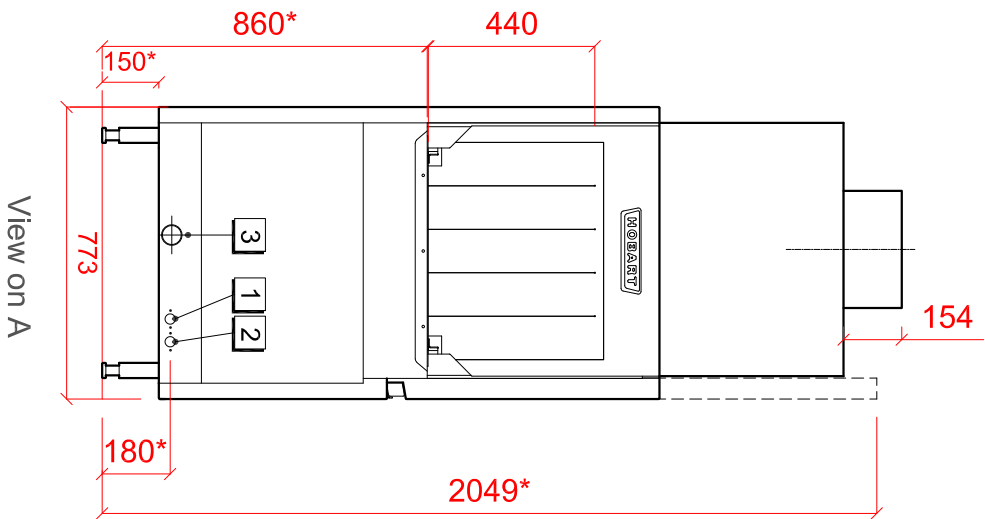

1	Water for Rinse	2	Hot Water for Tank Fill	3	Main machine drain	4	Electric Loading	5	Extract requirements
HOT FEED 3/4" B.S.P. Approx 50°C 1.5 BAR MIN TO 6.0 BAR MAX. MAX HARDNESS 8° CLARK.		3/4" B.S.P. Approx 50°C 1.0 BAR MIN TO 6.0 BAR MAX. INITIAL TANK FILL 110 LITRES. MAX HARDNESS 8° CLARK		MAIN MACHINE: GRAVITY DRAIN 50mm INSIDE DIAMETER. PEAK FLOW RATE 55 LITRES/MINUTE.		C815-A (Hot Feed Approx 50°C to Booster) 400/50/3 + N + E 22.3kW Fuse at 50amps/Phase. C815-A (Cold Feed Approx 10°C to Booster) 400/50/3 + N + E 29.8kW Fuse at 63amps/Phase.		MACHINE FITTED WITH EXHAUST FAN DISCHARGING 280m ³ /hr AT 44°C-46°C AND 90-98% r.f. THERE SHOULD BE A GENERAL PROVISION FOR ROOM VENTILATION DELIVERING A MINIMUM OF 30 AIR ROOM CHANGES PER HOUR AS PER LATEST DW172 SPECIFICATION	
COLD FEED 3/4" B.S.P. Approx 10°C 1.5 BAR MIN TO 6.0 BAR MAX. MAX HARDNESS 8° CLARK.		NOTE: FILLING WITH WATER AT LESS THAN 50°C WILL INCREASE INITIAL HEAT UP AND RECOVERY TIMES.						Notes CLASS 'AB' AIR GAP FITTED AS STANDARD. HEIGHTS MARKED * REPRESENT ±25mm. MINIMUM CLEARANCE FROM REAR WALL 44mm.	
USAGE 160 LITRES PER HOUR.									