
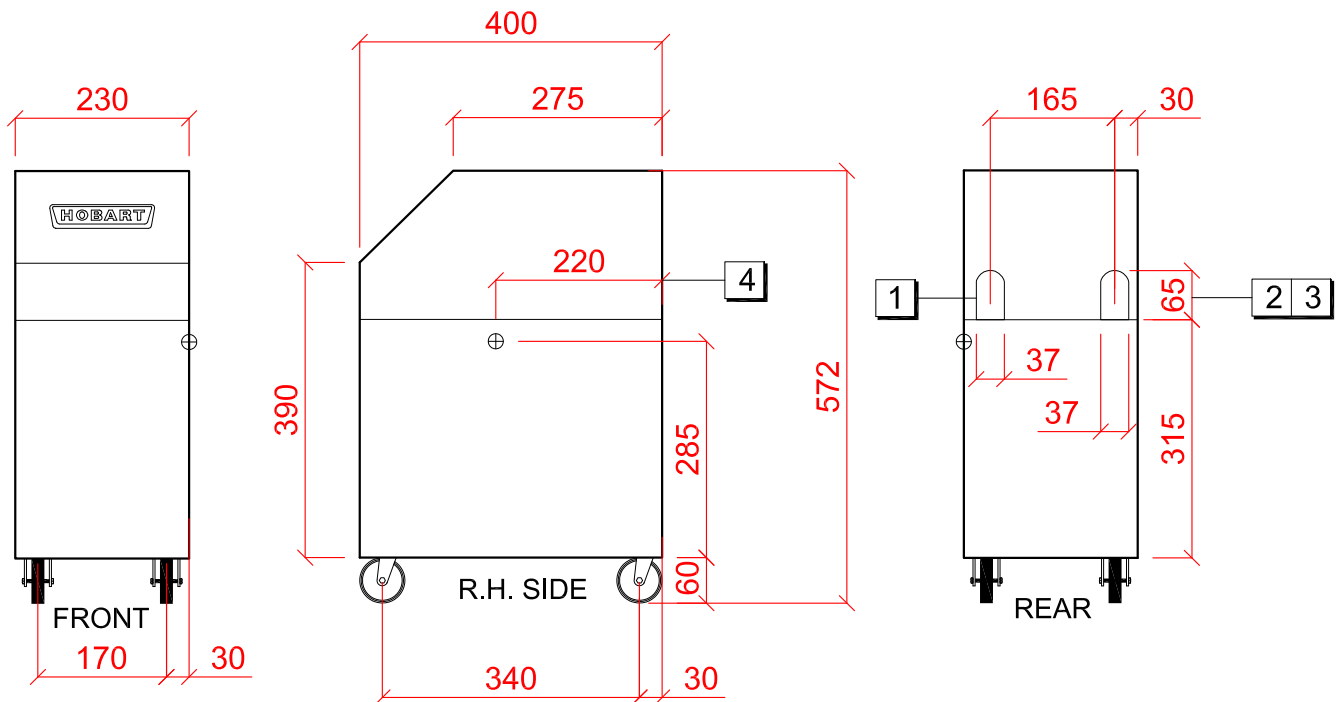


Water Softener

SE-H

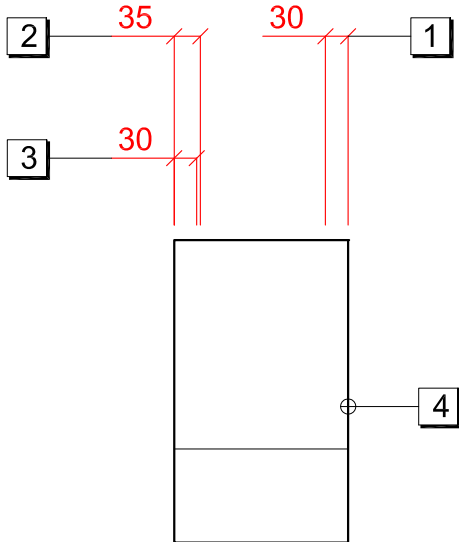

1 2 Water

1. INLET: 1.5 METRE HOSE WITH 3/4" B.S.P. FEMALE TERMINATION.
2°C MIN TO 50°C MAX. 2.0 TO 6.0 BAR.

2. OUTLET: 1.5 METRE HOSE WITH 3/4" B.S.P. FEMALE TERMINATION.

WATER SUPPLY TO HAVE INDEPENDENT ISOLATING VALVE

3 4 Drain

3. PUMPED DRAIN: 1/2" BARBED FITTING FOR CONNECTION TO HOSE (NOT SUPPLIED) AND THEN TO A 40mm TRAPPED STANDPIPE AT 200mm AFFL

4. OVERFLOW: 1/2" BARBED FITTING (THIS IS A VISIBLE SIGN OF ANY OVERFLOW AND SHOULD NOT BE CONNECTED IN SUCH A WAY AS NOT TO BE VISIBLE)

Electric

NO ELECTRICAL SUPPLY REQUIRED

Notes

NOMINAL SALT CAPACITY 10kg
SALT TABLETS ONLY- NOT GRANULAR OR POWDER